

BAW62

FEATURES :


- High switching speed: max. 4 ns
- Continuous reverse voltage: max. 75 V
- Repetitive peak reverse voltage: max. 75 V
- Repetitive peak forward current: max. 450 mA
- Pb / RoHS Free

MECHANICAL DATA :

Case: DO-35 Glass Case

Weight: approx. 0.13g

HIGH SPEED SWITCHING DIODE

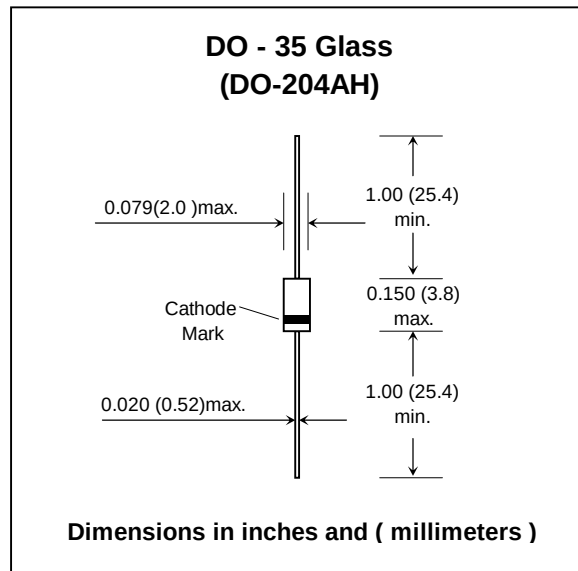

Maximum Ratings and Thermal Characteristics (Rating at 25 °C ambient temperature unless otherwise specified.)

Parameter	Symbol	Value	Unit
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	75	V
Maximum Continuous Reverse Voltage	V_{RM}	75	V
Maximum Continuous Forward Current	I_F	250	mA
Maximum Power Dissipation	P_D	350	mW
Maximum Repetitive Peak Forward Current	I_{FRM}	450	mA
Maximum Non-repetitive Peak Forward Current at $t = 1s$	I_{FSM}	0.5	A
Maximum Junction Temperature	T_J	200	°C
Storage Temperature Range	T_S	-65 to + 200	°C

Electrical Characteristics ($T_J = 25^{\circ}C$ unless otherwise noted)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Reverse Current	I_R	$V_R = 75 V$	-	-	5	μA
		$V_R = 75 V, T_J = 150^{\circ}C$	-	-	100	
Forward Voltage	V_F	$I_F = 100 mA$	-	-	1.0	V
Diode Capacitance	C_d	$f = 1MHz; V_R = 0$	-	-	2.0	pF
Reverse Recovery Time	T_{rr}	$I_F = 10 mA$ to $I_R = 10 mA$ $R_L = 100 \Omega$; measured at $I_R = 1mA$	-	-	4	ns

RATING AND CHARACTERISTIC CURVES (BAW62)

FIG. 1 MAXIMUM PERMISSIBLE CONTINUOUS FORWARD CURRENT AS A FUNCTION OF AMBIENT TEMPERATURE.

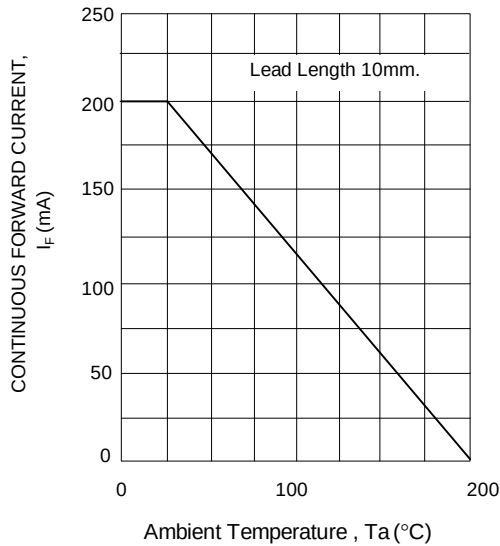


FIG. 2 TYPICAL FORWARD VOLTAGE

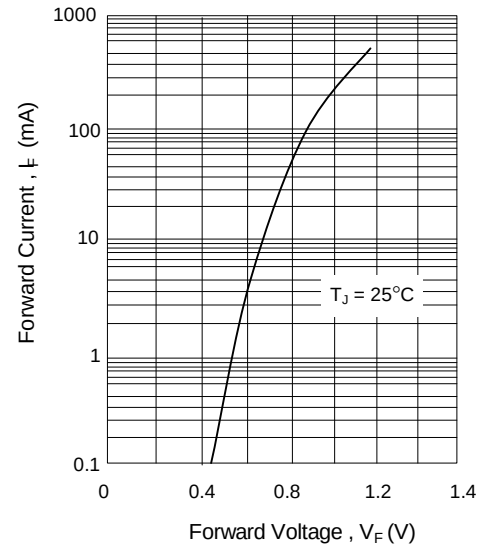


FIG. 3 TYPICAL DIODE CAPACITANCE AS A FUNCTION OF REVERSE VOLTAGE

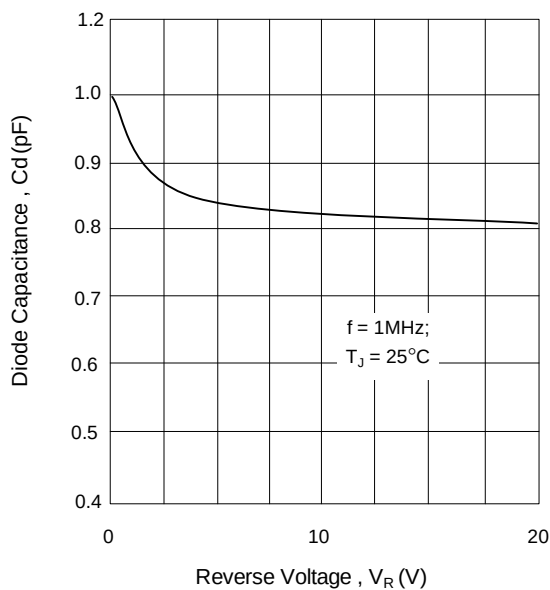


FIG.4 TYPICAL REVERSE CURRENT VS JUNCTION TEMPERATURE

