

SAC8.0-SIR

V_{BR} : 8.0 Volts

P_{PK} : 500 Watts

LOW CAPACITANCE TRANSIENT VOLTAGE SUPPRESSOR

FEATURES :

- * 500W Peak Pulse Surge reverse capability on 10/1000μs waveform
- * Excellent clamping capability
- * Low incremental surge resistance
- * Fast response time : typically less than 1.0 ns from 0 volts to BV
- * Pb / RoHS Free

MECHANICAL DATA

- * Case : DO-41 Molded plastic
- * Epoxy : UL94V-0 rate flame retardant
- * Lead : Axial lead solderable per MIL-STD-202, method 208 guaranteed
- * Polarity : Color band denotes cathode end
- * Mounting position : Any
- * Weight : 0.34 gram


MAXIMUM RATINGS

Rating at 25 °C ambient temperature unless otherwise specified

Rating	Symbol	Value	Unit
Peak Pulse Power Dissipation on 10/1000μs waveform (Note 1, Figure 1)	P _{PPM}	Minimum 500	W
Steady State Power Dissipation at T _L = 75 °C Lead Lengths 0.375", (9.5mm)	P _D	1.0	W
Peak Forward Surge Current on 10/1000 μs Waveform (Fig. 3, Note 1)	I _{FSM}	See Table 1.	A
Operating and Storage Temperature Range	T _J , T _{STG}	- 65 to + 175	°C

Note :

(1) Non-repetitive Current pulse per Fig. 5 and derated above T_a= 25 °C per Fig. 2

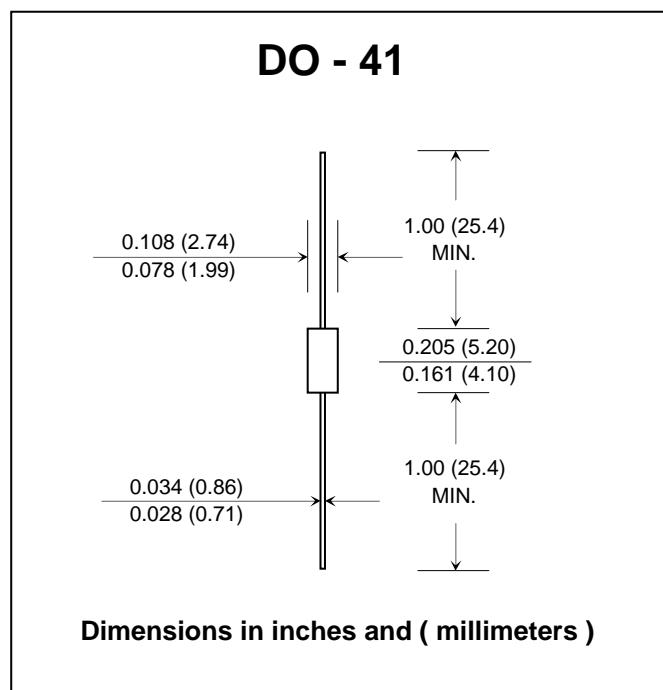

ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified

Type	Breakdown Voltage @ It		Reverse Stand-off Voltage	Maximum Reverse Leakage @ VRWM	Maximum Clamping Voltage @ IRSM=5A	Maximum Reverse Current	Maximum Junction Capacitance @ 0 Volt	Working Inverse Blocking Voltage	Max. Inverse Blocking Current @ V _{WIB}	Peak Inverse Blocking Voltage
	V _{BR} (V)	It	V _{RWM}	I _R	V _{RSM}	I _{RS} M		V _{WIB}	I _{IB}	V _{PIB}
	Min.	(mA)	(V)	(μA)	(V)	(A)		pF	(V)	mA
SAC8.0-SIR	8.9	1.0	8.0	25	13.4	36	50	75	1.0	100

FIG.1 - PEAK PULSE POWER RATING CURVE

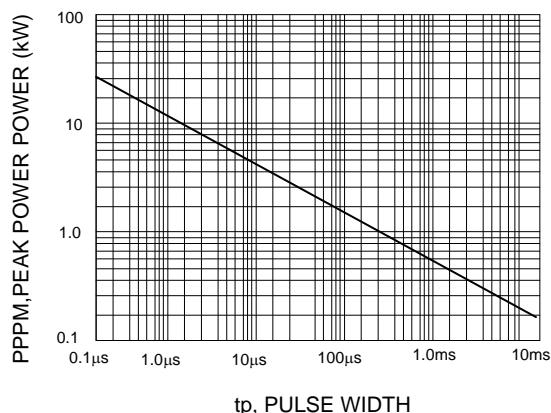


FIG.2 - PULSE DERATING CURVE

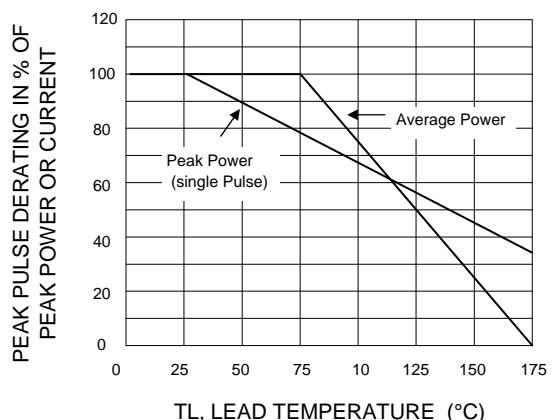


FIG.3 - PULSE WAVEFORM

